


Flanged ceramic package; 2 mounting holes; 2 leads

SOT1135A

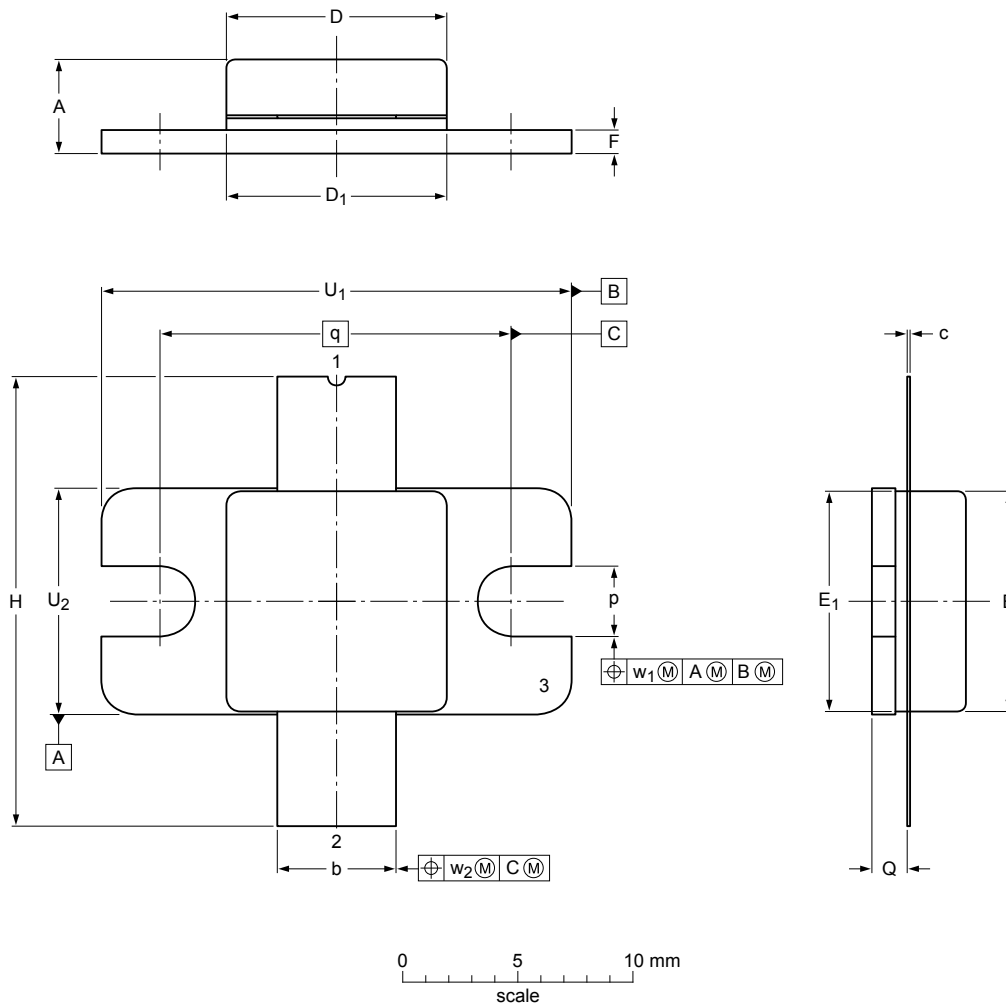

Dimensions

Unit ⁽¹⁾	A	b	c	D	D ₁	E	E ₁	F	H	p	Q	q	U ₁	U ₂	w ₁	w ₂
mm	max 4.65	5.26	0.18	9.65	9.65	9.65	9.65	1.14	19.94	3.30	1.70		20.45	9.91		
	nom 3.76	5.00	0.10	9.40	9.40	9.40	9.40	0.89	18.92	2.92	1.45	15.24	20.19	9.65	0.25	0.51
	min 0.183	0.207	0.007	0.38	0.38	0.38	0.38	0.045	0.785	0.130	0.067		0.805	0.39		
inches	nom 0.148	0.197	0.004	0.37	0.37	0.37	0.37	0.035	0.745	0.115	0.057	0.6	0.795	0.38	0.01	0.02
	min 0.148	0.197	0.004	0.37	0.37	0.37	0.37	0.035	0.745	0.115	0.057		0.795	0.38		

Note

1. millimeter dimensions are derived from the original inch dimensions.
2. dimension is measured 0.030 inch (0.76 mm) from the body.

sot1135a_po

Outline version	References			European projection	Issue date
	IEC	JEDEC	JEITA		
SOT1135A					09-10-12 09-12-14