BLC8G27LS-245AV

Power LDMOS transistor Rev. 4 — 24 November 2017

AMMPLEON

Product data sheet

Product profile 1.

1.1 General description

240 W LDMOS packaged asymmetric Doherty power transistor for base station applications at frequencies from 2500 MHz to 2700 MHz.

Typical performance

Typical RF performance at T_{case} = 25 °C in an asymmetrical Doherty demo board. V_{DS} = 28 V; I_{Dq} = 500 mA (main); $V_{GS(amp)peak}$ = 0.5 V, unless otherwise specified.

Test signal	f	V _{DS}	P _{L(AV)}	G _p	$\eta_{\mathbf{D}}$	ACPR
	(MHz)	(V)	(W)	(dB)	(%)	(dBc)
1-carrier W-CDMA	2500 to 2690	28	56	14.5	43	-35 <u>[1]</u>

^[1] Test signal: 3GPP test model 1; 64 DPCH; PAR = 7.2 dB at 0.01% probability on CCDF per carrier.

1.2 Features and benefits

- Excellent ruggedness
- High efficiency
- Low thermal resistance providing excellent thermal stability
- Designed for broadband operation (2500 MHz to 2700 MHz)
- Asymmetric design to achieve optimum efficiency across the band
- Lower output capacitance for improved performance in Doherty applications
- Designed for low memory effects providing excellent digital pre-distortion capability
- Internally matched for ease of use
- Integrated ESD protection
- Compliant to Directive 2002/95/EC, regarding Restriction of Hazardous Substances (RoHS)

1.3 Applications

RF power amplifiers for base stations and multi carrier applications in the 2500 MHz to 2700 MHz frequency range

2. Pinning information

Table 2. Pinning

Pin	Description	Simplified outline	Graphic symbol
1	drain2 (peak)	2 2 4 2	
2	drain1 (main)		2 ← 6
3	gate1 (main)	5	7-1-
4	gate2 (peak)		3—
5	source [1]	7 3 4 8	4—1-5
6	video decoupling (main)		8 ←
7	n.c.		9
8	n.c.		1
9	video decoupling (peak)		aaa-009150

^[1] Connected to flange.

3. Ordering information

Table 3. Ordering information

Type number	Packag	le e	
	Name	Description	Version
BLC8G27LS-245AV	-	air cavity plastic earless flanged package; 8 leads	SOT1251-2

4. Limiting values

Table 4. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134).

Symbol	Parameter	Conditions	Min	Max	Unit
V _{DS}	drain-source voltage		-	65	V
V _{GS(amp)main}	main amplifier gate-source voltage		-0.5	+13	V
V _{GS(amp)peak}	peak amplifier gate-source voltage		-0.5	+13	V
T _{stg}	storage temperature		-65	+150	°C
Tj	junction temperature	[1]	-	225	°C

Continuous use at maximum temperature will affect the reliability, for details refer to the online MTF calculator.

5. Thermal characteristics

Table 5. Thermal characteristics

Symbol	Parameter	Conditions	Тур	Unit
R _{th(j-c)}		T_{case} = 80 °C; P_{L} = 56 W; V_{DS} = 28 V; I_{Dq} = 500 mA (main); $V_{GS(amp)peak}$ = 0.5 V	0.3	K/W

6. Characteristics

 Table 6.
 DC characteristics

 $T_i = 25$ °C unless otherwise specified.

Symbol	Parameter	Conditions	Min	Тур	Max	Unit
Main dev	rice					
V _{(BR)DSS}	drain-source breakdown voltage	$V_{GS} = 0 \text{ V}; I_D = 1.8 \text{ mA}$	65	-	-	V
V _{GS(th)}	gate-source threshold voltage	V _{DS} = 10 V; I _D = 180 mA	1.5	1.9	2.3	V
V_{GSq}	gate-source quiescent voltage	V_{DS} = 28 V; I_{D} = 540 mA	1.6	2.1	2.4	V
I _{DSS}	drain leakage current	V _{GS} = 0 V; V _{DS} = 28 V	-	-	2.8	μΑ
I _{DSX}	drain cut-off current	$V_{GS} = V_{GS(th)} + 3.75 \text{ V};$ $V_{DS} = 10 \text{ V}$	-	30	-	Α
I _{GSS}	gate leakage current	V _{GS} = 11 V; V _{DS} = 0 V	-	-	280	nA
g _{fs}	forward transconductance	V _{DS} = 10 V; I _D = 180 mA	-	1.63	-	S
R _{DS(on)}	drain-source on-state resistance	$V_{GS} = V_{GS(th)} + 3.75 \text{ V};$ $I_D = 6.3 \text{ A}$	-	83	135	mΩ
Peak dev	rice		1			
V _{(BR)DSS}	drain-source breakdown voltage	$V_{GS} = 0 \text{ V}; I_D = 2.2 \text{ mA}$	65	-	-	V
V _{GS(th)}	gate-source threshold voltage	V _{DS} = 10 V; I _D = 220 mA	1.5	1.9	2.3	V
V_{GSq}	gate-source quiescent voltage	V _{DS} = 28 V; I _D = 660 mA	1.6	2.1	2.4	V
I _{DSS}	drain leakage current	V _{GS} = 0 V; V _{DS} = 28 V	-	-	2.8	μΑ
I _{DSX}	drain cut-off current	$V_{GS} = V_{GS(th)} + 3.75 \text{ V};$ $V_{DS} = 10 \text{ V}$	-	40	-	Α
I _{GSS}	gate leakage current	V _{GS} = 11 V; V _{DS} = 0 V	-	-	280	nA
9 _{fs}	forward transconductance	V _{DS} = 10 V; I _D = 220 mA	-	1.94	-	S
R _{DS(on)}	drain-source on-state resistance	$V_{GS} = V_{GS(th)} + 3.75 \text{ V};$ $I_D = 7.7 \text{ A}$	-	68	112	mΩ

Table 7. RF characteristics

Test signal: 1-carrier W-CDMA; PAR = 7.2 dB at 0.01 % probability on the CCDF; 3GPP test model 1; 1 to 64 DPCH; f_1 = 2500 MHz; f_2 = 2690 MHz; RF performance at V_{DS} = 28 V; I_{Dq} = 500 mA (main); $V_{GS(amp)peak}$ = 0.5 V; T_{case} = 25 °C; unless otherwise specified; in an asymmetrical Doherty production test circuit in 2500 MHz to 2690 MHz.

Symbol	Parameter	Conditions	Min	Тур	Max	Unit
Gp	power gain	P _{L(AV)} = 56 W	12.8	14	-	dB
RLin	input return loss	P _{L(AV)} = 56 W	-	-10	-6	dB
η_{D}	drain efficiency	P _{L(AV)} = 56 W	32	37	-	%
ACPR	adjacent channel power ratio	P _{L(AV)} = 56 W	-	-25	-20	dBc

7. Test information

7.1 Ruggedness in class-AB operation

The BLC8G27LS-245AV is capable of withstanding a load mismatch corresponding to VSWR = 10 : 1 through all phases under the following conditions: V_{DS} = 28 V; I_{Dq} = 500 mA (main); $V_{GS(amp)peak}$ = 0.5 V; P_L = 200 W; f = 2500 MHz.

BLC8G27LS-245AV

7.2 Impedance information

Table 8. Typical impedance of main device

Measured load-pull data of main device; I_{Dq} = 1000 mA; V_{DS} = 28 V. Typical values unless otherwise specified.

f	Z _S [1]	Z _L [1]	P _L [2]	η <mark>ρ^[2]</mark>	G _p [2]
(MHz)	(Ω)	(Ω)	(W)	(%)	(dB)
Maximum pov	wer load				
2500	2.7 – j4.1	1.0 – j4.5	197	56.3	13.1
2600	2.7 – j5.2	1.0 – j4.5	196	56.3	14.1
2700	2.9 – j4.3	1.0 – j4.5	186	54.3	15.7
Maximum dra	in efficiency load				
2500	2.7 – j4.1	1.7 – j3.9	159	62.6	15.2
2600	2.7 – j5.2	1.5 – j3.7	144	61.2	16.5
2700	2.9 – j4.3	1.4 – j4.1	149	58.5	17.2

^[1] Z_S and Z_L defined in Figure 1.


Table 9. Typical impedance of peak device

Measured load-pull data of peak device; I_{Dq} = 1230 mA; V_{DS} = 28 V. Typical values unless otherwise specified.

f	Z _S [1]	Z _L [1]	P _L [2]	η <mark>ρ^[2]</mark>	G _p [2]
(MHz)	(Ω)	(Ω)	(W)	(%)	(dB)
Maximum pov	ver load				
2500	2.5 – j5.6	2.1 – j4.9	256	53.3	13.7
2600	3.9 – j5.1	2.1 – j4.9	254	53.8	14.4
2700	3.4 – j4.2	2.6 – j5.1	240	53.3	15.9
Maximum dra	in efficiency load				
2500	2.5 – j5.6	2.0 – j2.9	187	62.1	16.0
2600	3.9 – j5.1	1.8 – j3.1	177	60.4	16.9
2700	3.4 – j4.2	1.8 – j3.5	174	59.5	18.1

^[1] Z_S and Z_L defined in Figure 1.

^[2] at 3 dB gain compression.

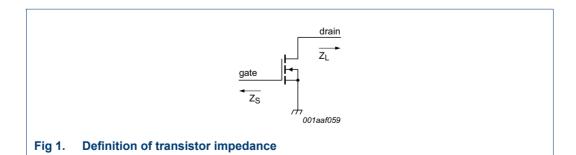

^[2] at 3 dB gain compression.

7.3 VBW in Doherty operation

The BLC8G27LS-245AV shows 110 MHz (typical) video bandwidth in Doherty demo board in 2600 MHz at V_{DS} = 28 V; I_{Dq} = 500 mA and $V_{GS(amp)peak}$ = 0.5 V.

7.4 Test circuit


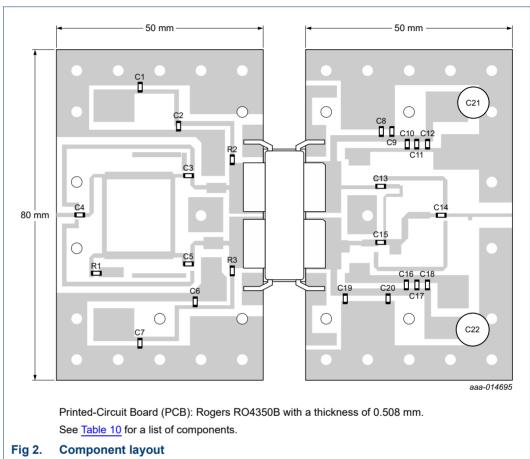


Table 10. List of components For test circuit see Figure 2.


Component	Description	Value	Remarks
C1, C7	multilayer ceramic chip capacitor	0.1 μF, 50 V	Murata
C2, C3, C4, C5, C6, C8, C9, C13, C14, C15, C19, C20	multilayer ceramic chip capacitor	22 pF	ATC 600A
C10, C11, C12, C16, C17, C18	multilayer ceramic chip capacitor	4.7 μF, 50 V	Murata
C21, C22	electrolytic capacitor	2200 μF, 63 V	
R1	resistor	50 Ω	
R2, R3	chip resistor	9.1 Ω	SMD 0805

7.5 Graphical data


7.5.1 CW

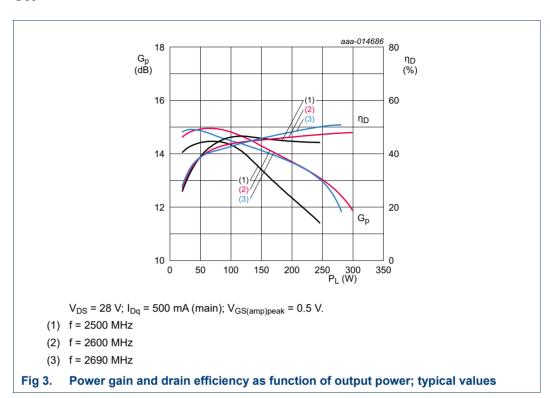

7.5.2 CW pulsed

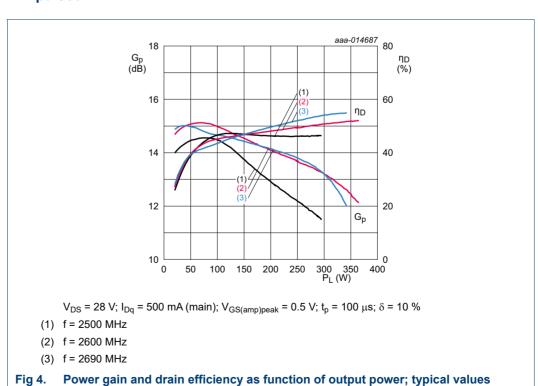


7.5.3 1-Carrier W-CDMA



 V_{DS} = 28 V; I_{Dq} = 500 mA (main); $V_{GS(amp)peak}$ = 0.5 V.

- (1) f = 2500 MHz
- (2) f = 2600 MHz
- (3) f = 2690 MHz


Fig 5. Power gain and drain efficiency as function of output power; typical values



 V_{DS} = 28 V; I_{Dq} = 500 mA (main); $V_{GS(amp)peak}$ = 0.5 V.

- (1) f = 2500 MHz
- (2) f = 2600 MHz
- (3) f = 2690 MHz

Fig 6. Adjacent channel power ratio (5 MHz) as a function of output power; typical values




 $V_{DS} = 28 \text{ V}; I_{Dq} = 500 \text{ mA (main)}; V_{GS(amp)peak} = 0.5 \text{ V}.$

- (1) f = 2500 MHz
- (2) f = 2600 MHz
- (3) f = 2690 MHz

Fig 7. Peak-to-average ratio as a function of output power; typical values


7.5.4 2-Carrier W-CDMA



 V_{DS} = 28 V; I_{Dq} = 500 mA (main); $V_{GS(amp)peak}$ = 0.5 V.

- (1) f = 2500 MHz
- (2) f = 2600 MHz
- (3) f = 2690 MHz

Fig 8. Power gain and drain efficiency as function of output power; typical values




 V_{DS} = 28 V; I_{Dq} = 500 mA (main); $V_{GS(amp)peak}$ = 0.5 V.

- (1) f = 2500 MHz
- (2) f = 2600 MHz
- (3) f = 2690 MHz

Fig 9. Adjacent channel power ratio (5 MHz) as a function of output power; typical values

7.5.5 2-Tone VBW

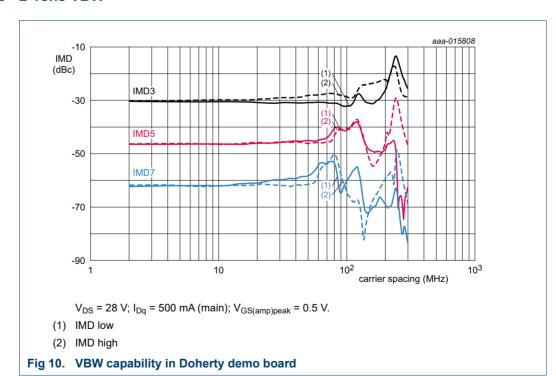

8. Package outline

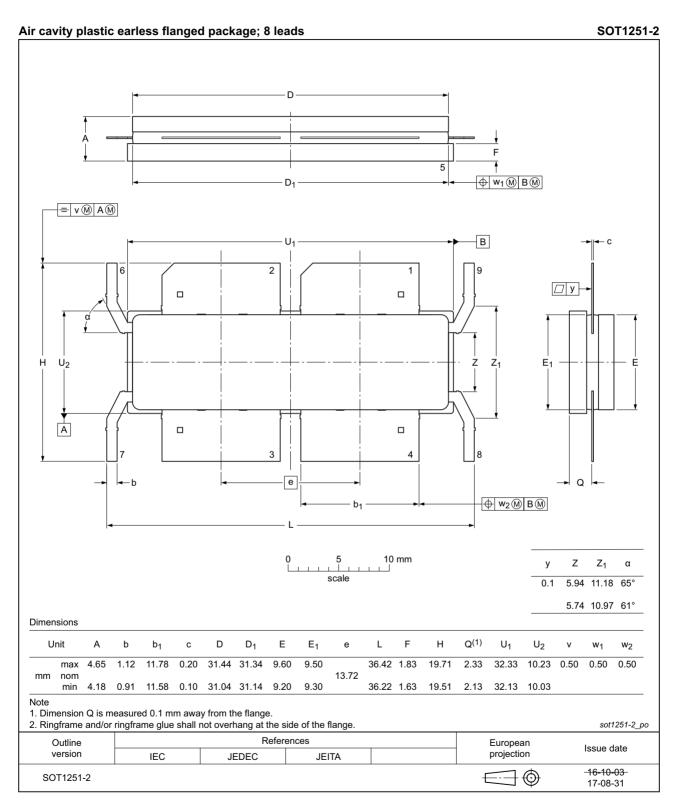


Fig 11. Package outline SOT1251-2

9. Handling information

CAUTION



This device is sensitive to ElectroStatic Discharge (ESD). Observe precautions for handling electrostatic sensitive devices.

Such precautions are described in the ANSI/ESD S20.20, IEC/ST 61340-5, JESD625-A or equivalent standards.

Table 11. ESD sensitivity

ESD model	Class
Charged Device Model (CDM); According to ANSI/ESDA/JEDEC standard JS-002	C2A [1]
Human Body Model (HBM); According to ANSI/ESDA/JEDEC standard JS-001	2 [2]

- [1] CDM classification C2A is granted to any part that passes after exposure to an ESD pulse of 500 V, but fails after exposure to an ESD pulse of 750 V.
- [2] HBM classification 2 is granted to any part that passes after exposure to an ESD pulse of 2000 V, but fails after exposure to an ESD pulse of 4000 V.

10. Abbreviations

Table 12. Abbreviations

Acronym	Description
3GPP	3rd Generation Partnership Project
CCDF	Complementary Cumulative Distribution Function
CW	Continuous Wave
DPCH	Dedicated Physical CHannel
ESD	ElectroStatic Discharge
LDMOS	Laterally Diffused Metal-Oxide Semiconductor
MTF	Median Time to Failure
PAR	Peak-to-Average Ratio
SMD	Surface Mounted Device
VBW	Video BandWidth
VSWR	Voltage Standing Wave Ratio
W-CDMA	Wideband Code Division Multiple Access

11. Revision history

Table 13. Revision history

Document ID	Release date	Data sheet status	Change notice	Supersedes
BLC8G27LS-245AV v.4	20171124	Product data sheet	-	BLC8G27LS-245AV v.3
Modifications:	• Figure 11 on	page 9: updated package out	line drawing SOT125	1-2
BLC8G27LS-245AV v.3	20161202	Product data sheet	-	BLC8G27LS-245AV v.2
BLC8G27LS-245AV v.2	20150901	Product data sheet	-	BLC8G27LS-245AV v.1
BLC8G27LS-245AV v.1	20141216	Product data sheet	-	-

BLC8G27LS-245AV

12. Legal information

12.1 Data sheet status

Document status[1][2]	Product status[3]	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

- [1] Please consult the most recently issued document before initiating or completing a design.
- [2] The term 'short data sheet' is explained in section "Definitions"
- [3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL https://www.ampleon.com.

12.2 Definitions

Draft — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. Ampleon does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local Ampleon sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

Product specification — The information and data provided in a Product data sheet shall define the specification of the product as agreed between Ampleon and its customer, unless Ampleon and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the Ampleon product is deemed to offer functions and qualities beyond those described in the Product data sheet.

12.3 Disclaimers

Limited warranty and liability — Information in this document is believed to be accurate and reliable. However, Ampleon does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. Ampleon takes no responsibility for the content in this document if provided by an information source outside of Ampleon.

In no event shall Ampleon be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, Ampleon's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the *Terms and conditions of commercial sale* of Ampleon.

Right to make changes — Ampleon reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use — Ampleon products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an

Ampleon product can reasonably be expected to result in personal injury, death or severe property or environmental damage. Ampleon and its suppliers accept no liability for inclusion and/or use of Ampleon products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

Applications — Applications that are described herein for any of these products are for illustrative purposes only. Ampleon makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using Ampleon products, and Ampleon accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the Ampleon product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

Ampleon does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using Ampleon products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). Ampleon does not accept any liability in this respect.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

Terms and conditions of commercial sale — Ampleon products are sold subject to the general terms and conditions of commercial sale, as published at http://www.ampleon.com/terms, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Ampleon hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of Ampleon products by customer.

No offer to sell or license — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

Export control — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

BLC8G27LS-245AV

All information provided in this document is subject to legal disclaimers.

© Ampleon Netherlands B.V. 2017. All rights reserved.

Non-automotive qualified products — Unless this data sheet expressly states that this specific Ampleon product is automotive qualified, the product is not suitable for automotive use. It is neither qualified nor tested in accordance with automotive testing or application requirements. Ampleon accepts no liability for inclusion and/or use of non-automotive qualified products in automotive equipment or applications.

In the event that customer uses the product for design-in and use in automotive applications to automotive specifications and standards, customer (a) shall use the product without Ampleon's warranty of the product for such automotive applications, use and specifications, and (b) whenever customer uses the product for automotive applications beyond Ampleon's specifications such use shall be solely at customer's own risk, and (c) customer fully indemnifies Ampleon for any liability, damages or failed product claims resulting from customer design and use of the product for automotive applications beyond Ampleon's standard warranty and Ampleon's product specifications.

Translations — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

12.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

Any reference or use of any 'NXP' trademark in this document or in or on the surface of Ampleon products does not result in any claim, liability or entitlement vis-à-vis the owner of this trademark. Ampleon is no longer part of the NXP group of companies and any reference to or use of the 'NXP' trademarks will be replaced by reference to or use of Ampleon's own trademarks.

13. Contact information

For more information, please visit: http://www.ampleon.com

For sales office addresses, please visit: http://www.ampleon.com/sales

AMPLEON

BLC8G27LS-245AV

Power LDMOS transistor

14. Contents

1	Product profile	1
1.1	General description	
1.2	Features and benefits	1
1.3	Applications	1
2	Pinning information	2
3	Ordering information	2
4	Limiting values	2
5	Thermal characteristics	2
6	Characteristics	3
7	Test information	
7.1	Ruggedness in class-AB operation	
7.2	Impedance information	
7.3	VBW in Doherty operation	
7.4	Test circuit	
7.5	Graphical data	6
7.5.1	CW	6
7.5.2	CW pulsed	
7.5.3	1-Carrier W-CDMA	
7.5.4	2-Carrier W-CDMA	
7.5.5	2-Tone VBW	
8	Package outline	
9	Handling information	. 10
10	Abbreviations	. 10
11	Revision history	. 10
12	Legal information	. 11
12.1	Data sheet status	
12.2	Definitions	. 11
12.3	Disclaimers	. 11
12.4	Trademarks	. 12
13	Contact information	. 12
14	Contents	. 13

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.